

SKYPER Serisi



6544




6574




6577




6578




6633





6653



6663



6683

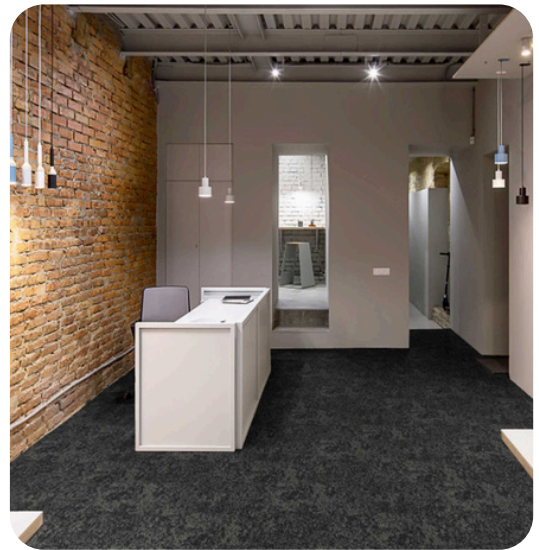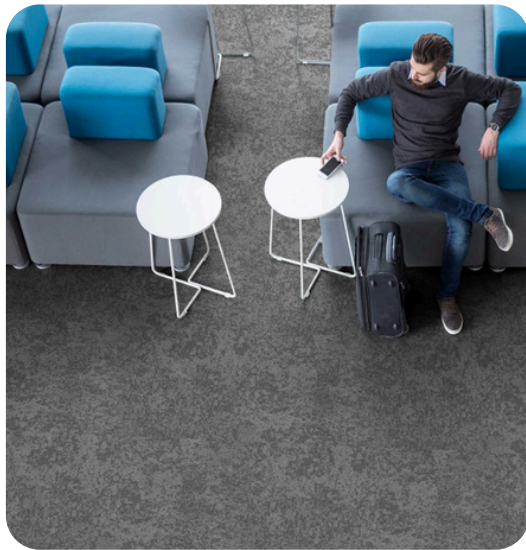

QUALITY

Construction	:	Scroll loop pile
Dye method	:	Solution dyed
Gauge	:	Tufted 1/10"
No. of tufts	ISO 1763	: ± 208820/m ²
Pile fibre	:	100% Nylon (PA 6)
Pile weight	ISO 8543	: 550 gr/m ² ± 5%
Pile height	ISO 1766	: 3.0 mm ± 5%
Primary backing	:	Non-Woven
Tile backing	:	Polyflex
Total thickness	ISO 1765	: 5,8 mm ± 5%
Total weight	ISO 8543	: 4100 gr/m ² ± 7,5%
Tile size	:	50 x 50 cm (± 19.7" x 19.7")
Tiles per box	:	20

ELEKTROSTATIC PROPERTIES

Walk on test	ISO 6356	: - 0,5 kV
Horizontal electrical resistance	ISO 10965	: 4,2 x 10 ¹² Ω
Vertical electrical resistance	ISO 10965	: 3,3 x 10 ¹¹ Ω
Static loading		: anti-static

COLOUR FASTNESS PROPERTIES

Light	EN ISO 105 B02	: 8
Rubbing, dry	EN ISO 105 X12	: 5
Rubbing, wet	ISO 105 X12	: 5
Water, change in colour	EN ISO 105-E01	: 4-5




MOON Serisi



203




205

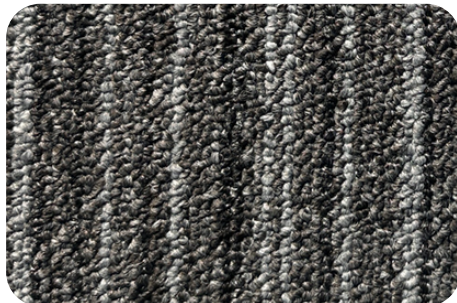

K236



K235

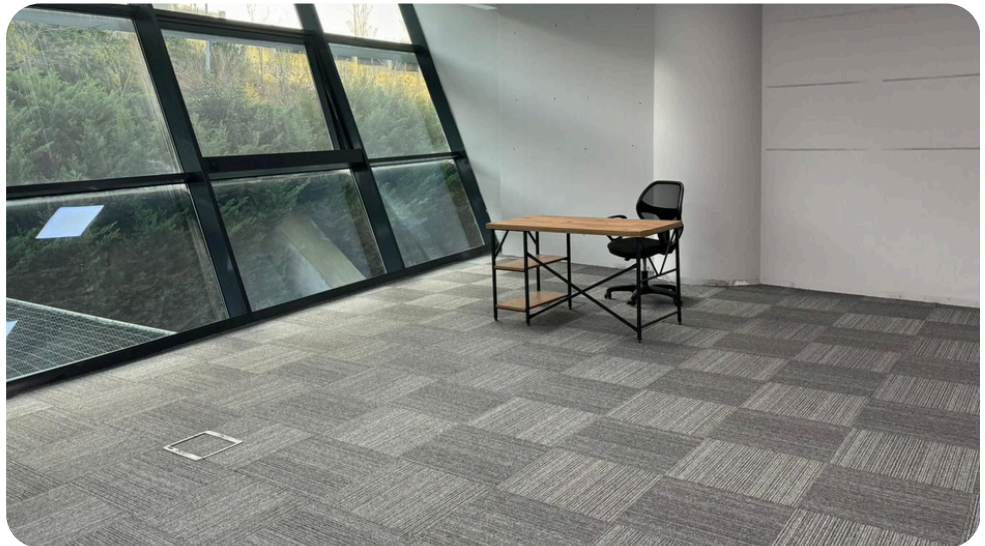

Construction : Tuffed Level Loop Pile
Yarn Type : %100 BCF PP
Dye Method : Solution Dyed
Gauge : 1/10"
Pile Height : 3 mm

Total Height : 5 mm
Total Weight : 450gr/m²
Tile Backing : Improved Bitumen
Tile Size : 50cm x 50cm
Packing : 20 Pcs Per Carton(5m²)



X-N Serisi



X061



X062



N80



Taban



Construction : Tuffed Level Loop Pile
Yarn Type : %100 BCF PP
Dye Method : Solution Dyed
Gauge : 1/12" (N80: 1/10")
Pile Height : 3 mm

Total Height : 7,5 mm
Total Weight : 550gr/m²
Tile Backing : Bitumen + 550G Cushion
Tile Size : 50cm x 50cm
Packing : 20 Pcs Per Carton(5m²)



NICE Serisi



3174



3176



3177



3178



3186



QUALITY

Product Definition	ISO 2424	Multitroll
Gauge		1/10"
No. of Tufts	ISO 1763	
Pile Fibre	ISO 2424	100% Polypropylene
Pile Weight	ISO 8543	690 gr/m ² ± 5%
Pile Height	ISO 1765	3 mm ± 5%
Primary Backing	ISO 2424	PA/PES non-woven
Tile Backing		Polyflex with non-woven fabric
Total Thickness	ISO 1765	5 mm ± 5%
Total Weight	ISO 8543	4200 gr/m ² ± 7,5%
Tile Size	EN 986	50 x 50 cm (± 19.7" x 19.7") 20
Tiles per box		Contract Class 32
Use Classification	EN 1307	Pass
Abrasion		Pass
Vettermann Test	ISO 10361	Pass
Dimensional Stability	ISO 10361	Pass
Thermal Isolation		

ELEKTROSTATIC PROPERTIES

Static Loading	ISO 2424	Anti-static
Flame Properties		
Reaction to Fire	ISO 1763	
Hot Metal Nut Test	EN130501-1	CFI-SI Low Radius

COLOUR FASTNESS PROPERTIES

Light	ISO 105 B02	>5.0
Rubbing, Dry	ISO 105 X12	>4.0
Rubbing, Wet		
Shampoo		
Water	ISO 105 E01	>4.0

GENERAL

Recommended Maintenance	
Pile Direction	
Laying Instructions	

Test results are obtained when cleaned with a dry shampoo method. Directional arrows are printed on the back of each tile. Test results are obtained when laid on wooden floor. Tiles require no underlay, making gluing or nailing and taping the most common on flat dry floor slippery floor. When tiles are laid on parquet, vinyl or in open areas larger than 50 m² it is advisable to use double sided adhesive tape on every 50 cm or so.



SAMOS Serisi



575



577



QUALITY

Product Definition	ISO 2424	Tufted Loop Pile
Gauge		1/10"
No. of Tufts	ISO 1763	± 177750/m ² (-7.5%, +10%)
Pile Fibre	ISO 2424	100% Polypropylene
Pile Weight	ISO 8543	660 gr/m ² ±5% (±10 oz/yd ²)
Pile Height	ISO 1765	3.0 mm
Primary Backing	ISO 2424	non-woven
Tile Backing		Polyflex
Total Thickness	ISO 1765	5.0 mm
Total Weight	ISO 8543	3660 gr/m ² (± 15%)
Tile Size	EN 986	50 x 50 cm (± 0.2%)
Tiles per box		20
Use Classification	EN 1307	Contract Class 32
Abrasion		Pass
Vettermann Test	ISO 10361	Pass
Dimensional Stability	ISO 10361	Pass
Thermal Isolation		

ELEKTROSTATIC PROPERTIES

Static Loading	ISO 2424	Anti-static
Flame Properties		
Reaction to Fire	ISO 1763	
Hot Metal Nut Test	EN130501-1	Cfl-SI

COLOUR FASTNESS PROPERTIES

Light	ISO 105 B02	>5.0
Rubbing, Dry	ISO 105 X12	>4.0
Rubbing, Wet		
Shampoo		
Water	ISO 105 E01	>4.0

GENERAL

Recommended Maintenance	
Pile Direction	
Laying Instructions	

Best results are obtained when cleaned with a dry abrasion method. Directional arrows are printed on the back of each tile. Best results are obtained when laid on a hard, dry, non-slippery floor. When tiles are laid on parquet, wood or in open areas larger than 20 m² it is advisable to use double sided adhesive tape on every 20th row or a



MALAGA Serisi



575



577



QUALITY

Product Definition	ISO 2424	Tufted Loop Pile
Gauge	1/10"	
No. of Tufts	ISO 1763	$\pm 177750/m^2$ (-7.5% , +10%) 100%
Pile Fibre	ISO 2424	Polypropylene
Pile Weight	ISO 8543	660 gr/m ² $\pm 5%$ (± 10 oz/yd ²)
Pile Height	ISO 1765	3.0 mm $\pm 5%$
Primary Backing	ISO 2424	PA/PES non-woven
Tile Backing		Polyflex non-woven fabric
Total Thickness	ISO 1765	6.0 mm $\pm 5%$
Total Weight	ISO 8543	3800 gr/m ² $\pm 7.5%$ (± 109 oz/yd ²)
Tile Size	EN 986	50 x 50 cm (± 19.7 x 19.7)
Tiles per box		20
Use Classification	EN 1307	Contract Class 32
Abrasion		Pass
Vettermann Test	ISO 10361	Pass
Dimensional Stability	ISO 10361	Pass
Thermal Isolation		

ELEKTROSTATIC PROPERTIES

Static Loading	ISO 2424	Anti-static
Flame Properties		
Reaction to Fire	ISO 1763	
Hot Metal Nut Test	EN130501-1	Cfl-S1

COLOUR FASTNESS PROPERTIES

Light	ISO 105 B02	>5.0
Rubbing, Dry	ISO 105 X12	>4.0
Rubbing, Wet		
Shampoo		
Water	ISO 105 E01	>4.0

GENERAL

Recommended Maintenance
Pile Direction
Laying Instructions

Best results are obtained when cleaned with a dry shampoo method. Detailed advice can be found on the back of each tile. Best results are obtained when laid on a clean, dry, non-slippery floor. When tiles are laid on concrete, vinyl or in open areas larger than 10 m² it is advisable to use double sided adhesive tape on every 5th row or 5.



SANTORINI Serisi



3276



3278



QUALITY

Product Definition	ISO 2424	Tufted Loop Pile
Gauge		1/10"
No. of Tufts	ISO 1763	± 177750/m ² (-7.5%, +10%)
Pile Fibre	ISO 2424	100% Polypropylene
Pile Weight	ISO 8543	660 gr/m ² ±5% (±10 oz/yd ²)
Pile Height	ISO 1765	3.0 mm
Primary Backing	ISO 2424	non-woven
Tile Backing		Polyflex
Total Thickness	ISO 1765	5.0 mm
Total Weight	ISO 8543	3660 gr/m ² (± 15%)
Tile Size	EN 986	50 x 50 cm (± 0.2%)
Tiles per box		20
Use Classification	EN 1307	Contract Class 32
Abrasion	ISO 10361	Pass
Vettermann Test	ISO 10361	Pass
Dimensional Stability		Pass
Thermal Isolation		

ELEKTROSTATIC PROPERTIES

Static Loading	ISO 2424	Anti-static
Flame Properties		
Reaction to Fire	ISO 1763	ClI-SI
Hot Metal Nut Test	EN130501-1	

COLOUR FASTNESS PROPERTIES

Light	ISO 105 B02	>5.0
Rubbing, Dry	ISO 105 X12	>4.0
Rubbing, Wet		
Shampoo		
Water	ISO 105 E01	>4.0

GENERAL

Recommended Maintenance	
Pile Direction	
Laying Instructions	

Best results are obtained when cleaned with a dry-foam-spray method. Disinfectant sprays are permitted on the back of each tile. Best results are obtained when laid over a concrete subfloor. Tiles require an underlay, making gluing or sewing and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on carpet, vinyl or in open areas larger than 30 m² it is advisable to use double-sided adhesive tape on every 6th row or 4.





SPARTA - MADRID Line Serisi



SPARTA 2728



SPARTA 27278



MADRID LINE 27873



QUALITY

Product Definition	ISO 2424	Tufted Loop Pile
Gauge		1/10"
No. of Tufts	ISO 1763	± 173.360/m ²
Pile Fibre	ISO 2424	100% PA SDN
Pile Weight	ISO 8543	510 gr/m ² ± 5%
Pile Height	ISO 1765	3.5 mm ± 5%
Primary Backing	ISO 2424	PA/PES non-woven-Colback
Tile Backing		Polyflex
Total Thickness	ISO 1765	5.2 mm ± 5%
Total Weight	ISO 8543	3800 gr/m ² ± 7,5%
Tile Size	EN 986	50 x 50 cm (± 19.7" x 19.7")
Tiles per box		20
Use Classification	EN 1307	Heavy Contract Class 33
Abrasion		Pass
Vettermann Test		Pass
Dimensional Stability	ISO 10361	Pass
Thermal Isolation	ISO 10361	Pass

ELEKTROSTATIC PROPERTIES

Static Loading	ISO 2424	Anti-static
Flame Properties		
Reaction to Fire	ISO 1763	
Hot Metal Nut Test	EN130501-1	Bfl-S1

COLOUR FASTNESS PROPERTIES

Light	ISO 105 B02	>5.0
Rubbing, Dry	ISO 105 X12	5.0
Rubbing, Wet		5.0
Shampoo		5.0
Water	ISO 105 E01	4.0

GENERAL

Recommended Maintenance
Pile Direction
Laying Instructions


Best results are obtained when cleaned with a dry shampoo method. Directional arrows are printed on the back of each tile. Best results are obtained when laid on a clean, dry, level surface. Tiles require no underlay, making gluing or nailing and more be used to secure on a flat, dry, non-slippery floor. When laid on a tiled or concrete floor, use a double sided adhesive tape on every 5th row or so.



TAMPA Serisi




1120




1174



1178

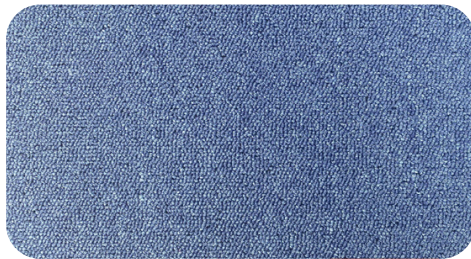

1181

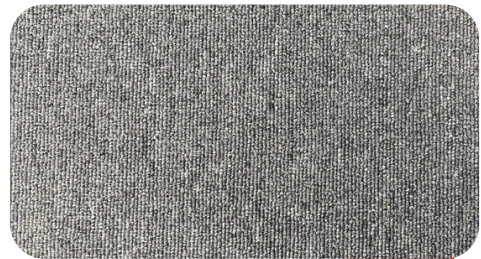

1182



QUALITY

Product Definition	ISO 2424 Tufted Loop Pile
Gauge	1/10"
No. of Tufts	ISO 1763 $\pm 168000/m^2$ (163043/ycd) 100%
Pile Fibre	ISO 2424 Polypropylene
Pile Weight	ISO 8543 360 gr/m ² $\pm 5%$ (± 10 oz/ycd)
Pile Height	ISO 1765 3.0 mm $\pm 5%$
Primary Backing	ISO 2424 PA/PES non-woven
Tile Backing	Polyfex non-woven fabric
Total Thickness	ISO 1765 6.0 mm $\pm 5%$
Total Weight	ISO 8543 3790 gr/m ² $\pm 7.5%$ (± 109 oz/ycd)
Tile Size	EN 986 50 x 50 cm (± 19.7 x 19.7")
Tiles per box	20
Use Classification	EN 1307 Light Contract Class 32
Abrasion	ISO 10361 Pass
Vettermann Test	ISO 10361 Pass
Dimensional Stability	Pass
Thermal Isolation	0.10 m ² K/W

ELEKTROSTATIC PROPERTIES

Static Loading	ISO 2424	Anti-static
Flame Properties		
Reaction to Fire	ISO 1763	Cfl-S1
Hot Metal Nut Test	EN130501-1	Low Radius

COLOUR FASTNESS PROPERTIES

Light	4.4
Rubbing, Dry	5.0
Rubbing, Wet	5.0
Shampoo	4.8
Water	4.8

GENERAL

Recommended Maintenance
Pile Direction
Laying Instructions

Best results are obtained when cleaned with a dry shampoo method. Directional arrows are printed on the back of each tile. Best results are obtained when laid checkerboard. Tiles require no underlay, mastic, grouting or seaming and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on parquet, vinyl or in open areas larger than 20 cm it is advisable to use double sided adhesive tape on every fifth row or a



TAMPA STRIPE Serisi



1478



1520



1575



1586



QUALITY

Product Definition	ISO 2424	Tufted Loop Pile
Gauge		1/10"
No. of Tufts	ISO 1763	± 168000/m ² (163043/ycd ²)
Pile Fibre	ISO 2424	100% Polypropylene
Pile Weight	ISO 8543	360 gr/m ² ± 5% (± 10 oz/ycd ²)
Pile Height	ISO 1765	3.0 mm ± 5%
Primary Backing	ISO 2424	PA/PES non-woven
Tile Backing		Polyex non-woven fabric
Total Thickness	ISO 1765	6.0 mm ± 5%
Total Weight	ISO 8543	3790 gr/m ² ± 7.5% (± 109 oz/ycd ²)
Tile Size	EN 986	50 x 50 cm (± 19.7" x 19.7")
Tiles per box		20
Use Classification	EN 1307	Light Contract Class 22
Abrasion		Pass
Vettermann Test	ISO 10361	Pass
Dimensional Stability	ISO 10361	Pass
Thermal Isolation		0.10 m ² K/W

ELEKTROSTATIC PROPERTIES

Static Loading	ISO 2424	Anti-static
Flame Properties		
Reaction to Fire	ISO 1763	
Hot Metal Nut Test	EN130501-1	Cl-SI
		Low Radius

COLOUR FASTNESS PROPERTIES

Light		4.4
Rubbing, Dry	ISO 105 B02	5.0
Rubbing, Wet	ISO 105 X12	5.0
Shampoo		4.8
Water	ISO 105 E01	4.8


GENERAL

Recommended Maintenance	
Pile Direction	
Laying Instructions	



Test results are obtained when observed with a dry photovolt method. Electrical charges are printed on the back of each tile. Best results are obtained when laid on a concrete floor. This requires an underlayment, grouting or leveling and may be laid loose on a flat, dry, non-slippery floor. When there are laid on carpet, vinyl or in open areas longer than 10 m² it is advisable to use suitable roller rollers type on every 200 m² or so.



MULTI STRIPE Serisi

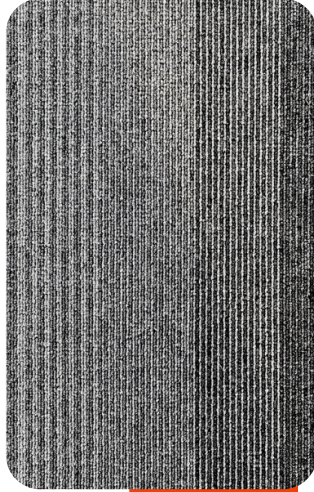

7478

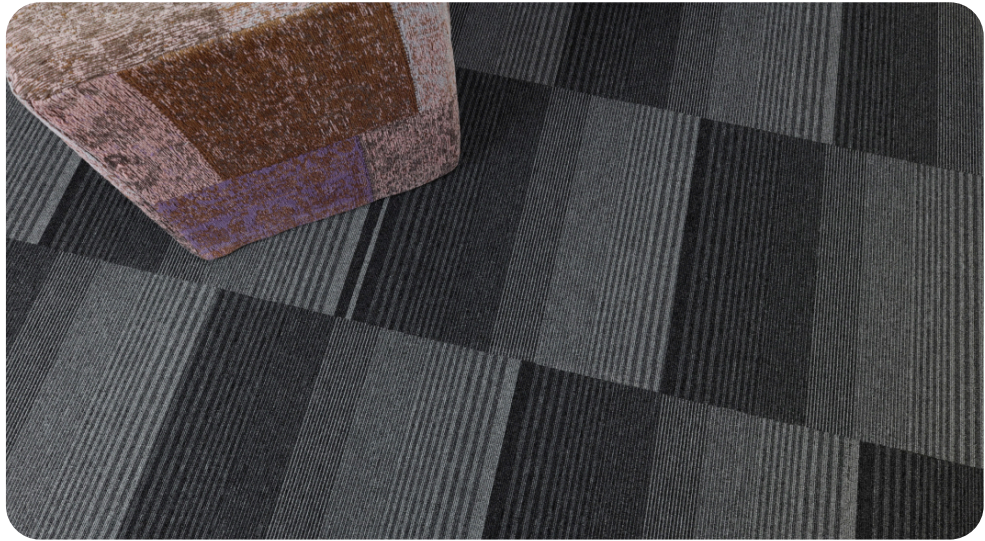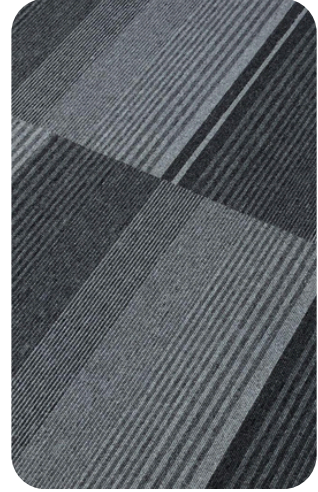

QUALITY

Product Definition	ISO 2424	Tufted Loop Pile
Gauge		1/10"
No. of Tufts	ISO 1763	± 168000/m ² (163043/yd ²)
Pile Fibre	ISO 2424	100% Polypropylene
Pile Weight	ISO 8543	360 gr/m ² ± 5% (± 10 oz/yd ²)
Pile Height	ISO 1765	3.0 mm ± 5%
Primary Backing	ISO 2424	PA/PES non-woven
Tile Backing		Polyflex non-woven fabric
Total Thickness	ISO 1765	6.0 mm ± 5%
Total Weight	ISO 8543	3790 gr/m ² ± 7.5% (± 109 oz/yd ²)
Tile Size	EN 986	50 x 50 cm (± 19.7" x 19.7")
Tiles per box		20
Use Classification	EN 1307	Light Contract Class 22
Abrasion		Pass
Vettermann Test	ISO 10361	Pass
Dimensional Stability	ISO 10361	Pass
Thermal Isolation		0.10 m ² K/W

ELEKTROSTATIC PROPERTIES

Static Loading	ISO 2424	Anti-static
Reaction to Fire	ISO 1763	Cfl-S1
Hot Metal Nut Test	EN130501-1	Low Radius

COLOUR FASTNESS PROPERTIES

Light		4.4
Rubbing, Dry	ISO 105 B02	5.0
Rubbing, Wet	ISO 105 X12	5.0
Shampoo		4.8
Water	ISO 105 E01	4.8

GENERAL

Recommended Maintenance
Pile Direction
Laying Instructions

Best results are obtained when cleaned with a dry shampoo method. Directional arrows are printed on the back of each tile. Best results are obtained when laid checkered. They require no underlay, matting, grating or seaming, and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on groutless, laid on in open areas longer than 30 m² it is advisable to use suitable added adhesive tape on every 50th row or 5

