

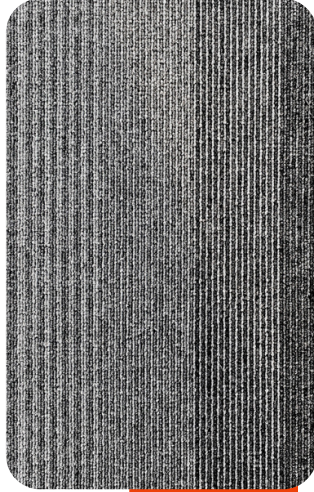


MULTI STRIPE Serisi

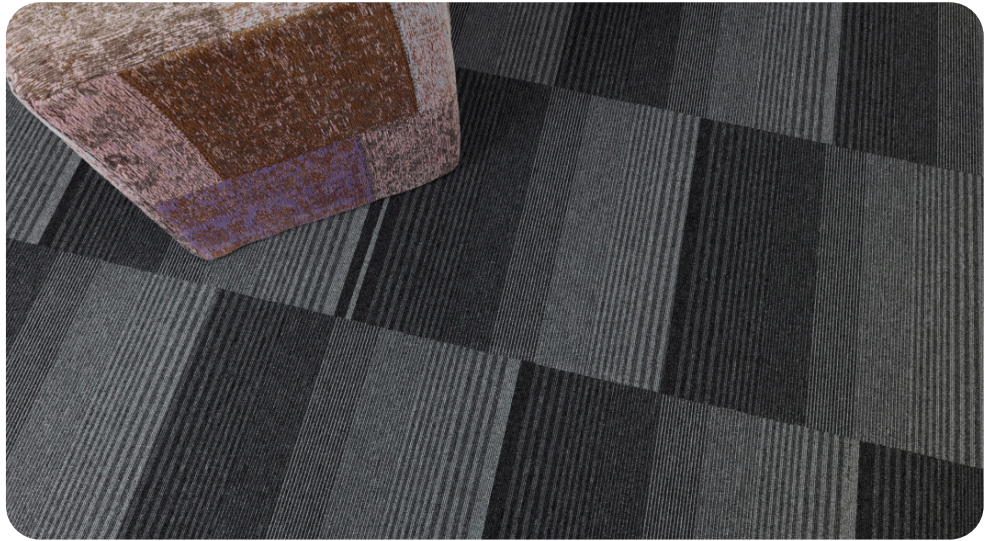

7478

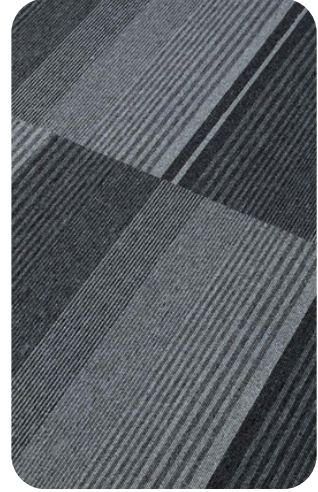

QUALITY

Product Definition	ISO 2424	Tufted Loop Pile
Gauge		1/10"
No. of Tufts	ISO 1763	± 168000/m ² (163043/yd ²)
Pile Fibre	ISO 2424	100% Polypropylene
Pile Weight	ISO 8543	360 gr/m ² ± 5% (± 10 oz/yd ²)
Pile Height	ISO 1765	3.0 mm ± 5%
Primary Backing	ISO 2424	PA/PES non-woven
Tile Backing		Polyflex non-woven fabric
Total Thickness	ISO 1765	6.0 mm ± 5%
Total Weight	ISO 8543	3790 gr/m ² ± 7.5% (± 109 oz/yd ²)
Tile Size	EN 986	50 x 50 cm (± 19.7" x 19.7")
Tiles per box		20
Use Classification	EN 1307	Light Contract Class 22
Abrasion		Pass
Vettermann Test	ISO 10361	Pass
Dimensional Stability	ISO 10361	Pass
Thermal Isolation		0.10 m ² K/W

ELEKTROSTATIC PROPERTIES

Static Loading	ISO 2424	Anti-static
Reaction to Fire	ISO 1763	Cfl-S1
Hot Metal Nut Test	EN130501-1	Low Radius

COLOUR FASTNESS PROPERTIES

Light		4.4
Rubbing, Dry	ISO 105 B02	5.0
Rubbing, Wet	ISO 105 X12	5.0
Shampoo		4.8
Water	ISO 105 E01	4.8

GENERAL

Recommended Maintenance
Pile Direction
Laying Instructions

Best results are obtained when cleaned with a dry shampoo method. Directional creases are printed on the back of each tile. Best results are obtained when laid checkered. They require no underlay, matting, grating or seaming, and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on groutless, laid on in open areas longer than 30 m² it is advisable to use suitable added adhesive tape on every 5th row or 5

