



TAMPA Serisi




1120



1174



1178

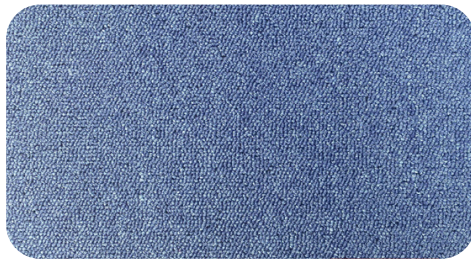

1181



1182



QUALITY

Product Definition	ISO 2424 Tufted Loop Pile
Gauge	1/10"
No. of Tufts	ISO 1763 $\pm 168000/m^2$ (163043/ycd) 100%
Pile Fibre	ISO 2424 Polypropylene
Pile Weight	ISO 8543 360 gr/m ² $\pm 5%$ (± 10 oz/ycd)
Pile Height	ISO 1765 3.0 mm $\pm 5%$
Primary Backing	ISO 2424 PA/PES non-woven
Tile Backing	Polyfex non-woven fabric
Total Thickness	ISO 1765 6.0 mm $\pm 5%$
Total Weight	ISO 8543 3790 gr/m ² $\pm 7.5%$ (± 109 oz/ycd)
Tile Size	EN 986 50 x 50 cm (± 19.7 x 19.7")
Tiles per box	20
Use Classification	EN 1307 Light Contract Class 32
Abrasion	ISO 10361 Pass
Vettermann Test	ISO 10361 Pass
Dimensional Stability	Pass
Thermal Isolation	0.10 m ² K/W

ELEKTROSTATIC PROPERTIES

Static Loading	ISO 2424	Anti-static
Flame Properties		
Reaction to Fire	ISO 1763	Cfl-S1
Hot Metal Nut Test	EN130501-1	Low Radius

COLOUR FASTNESS PROPERTIES

Light	4.4
Rubbing, Dry	5.0
Rubbing, Wet	5.0
Shampoo	4.8
Water	4.8

GENERAL

Recommended Maintenance
Pile Direction
Laying Instructions

Best results are obtained when cleaned with a dry shampoo method. Directional arrows are printed on the back of each tile. Best results are obtained when laid checkerboard. Tiles require no underlay, mastic, grouting or seaming and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on parquet, vinyl or in open areas larger than 20 cm it is advisable to use double sided adhesive tape on every fifth row or a

